


INLET VALVES

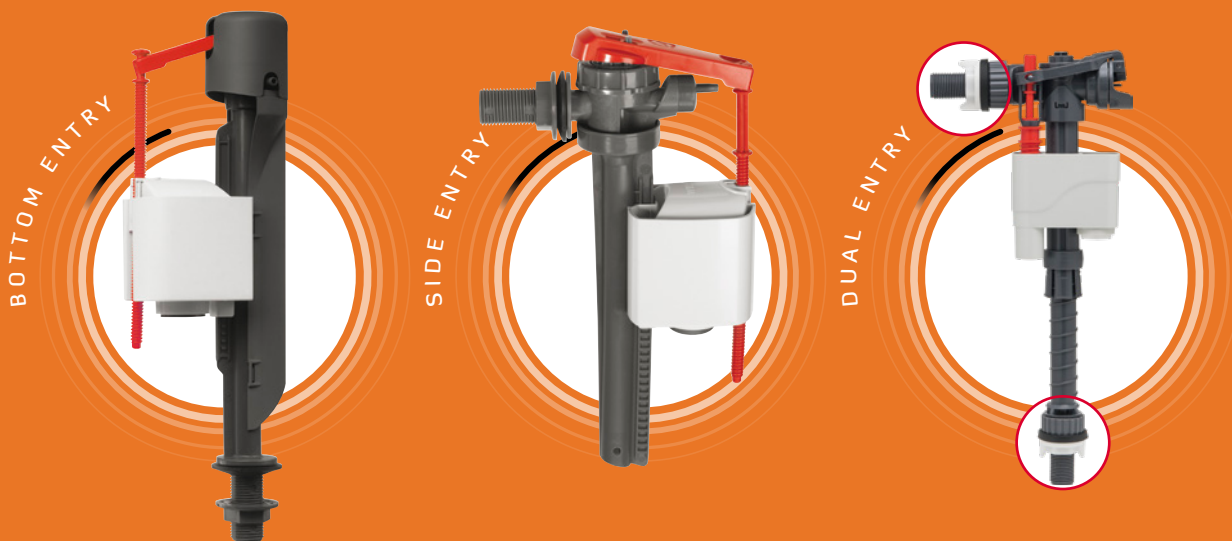



wirquin

INLET VALVES

	NAME	REFERENCE	HEIGHT IN MM	INSTALLED WIDTH IN MM	CONNECTION	FLOW RATE AT 3 BAR	FUNCTIONING RANGE IN BAR	FILLING TIME IN SECONDS	ACOUSTICS IN DB	ANTI-SIPHONIC	COMMENTS- PRODUCT FEATURES
DUAL INLET	DOBLO	10932000	20-311	106	1/2" PLASTIC	11,0 L/min (Side inlet) 10,0 L/min (Bottom inlet)	0,20 to 16	27	17	●	Dual entry - Side or bottom telescopic Water saving - Approximate saving of 7L water per day (based on a family of 4).
BOTTOM INLET	JOLLYFILL	10932001	280	100	1/2" PLASTIC	11,6 L/min	0,10 to 16	27	17	●	Anti-water hammer and surge protection. (up to 16 bar). Low noise levels.
	JOLLYFILL TELESCOPIC	10932002	250-390	110	1/2" PLASTIC	11,6 L/min	0,10 to 16	27	17	●	Anti-water hammer and surge protection.(up to 16 bar). Low noise levels. Overtightening protection.
	JOLLYFILL TELESCOPIC Brass inlet	16110011	250-390	110	3/8" BRASS	10,3 L/min	0,10 to 16	35	17	●	Anti-water hammer and surge protection.(up to 16 bar). Low noise levels. Overtightening protection.
SIDE INLET	JOLLYFILL	10932010	259	105	1/2" PLASTIC	8,4 L/min	0,10 to 16	43	17	●	Ultra compact. Ideal for narrow cisterns.
	TOPY 1/2" plastic inlet	16300601	180	90	1/2" PLASTIC	8,4 L/min	0,10 to 14	43	20	●	Ultra compact. Ideal for narrow cisterns.
	TOPY 3/8" brass inlet	16300501	180	90	3/8" BRASS	8,4 L/min	0,10 to 14	43	20	●	Ultra compact. Ideal for narrow cisterns.

DOBLO

DUAL ENTRY inlet valve **BOTTOM OR SIDE ENTRY**

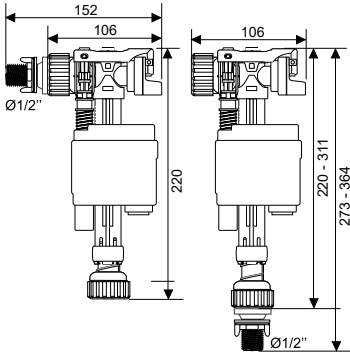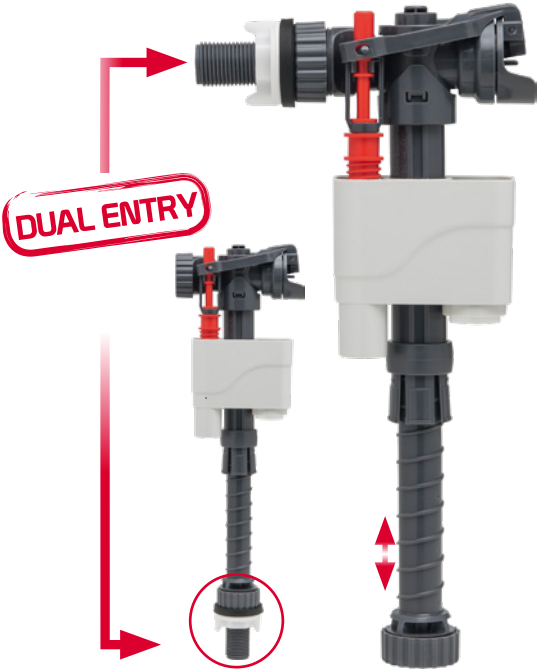

DOBLO inlet valve fits **ALL WATER SUPPLIES**: bottom or side entry, thanks to its interchangeable inlet. In addition, its **DELAYED ACTION TECHNOLOGY** saves up to 7L per day.



DUEL ENTRY INLET
• Bottom or side entry



WATER SAVING
• Delayed action filling




QUICK AND EASY TO INSTALL AND MAINTAIN:
• Easy to adjust float level

Description	DOBLO INLET VALVE
Reference	10932000
Ean code	3375539990779
Packaging	box
Multiple / box qty	01 / 12
Type	servo-valve
Entry	side or bottom telescopic - plastic inlet 1/2"
Pressure	from 0,2 to 16 bar. Resists pressure spikes of up to 20 bar.
Adjustment	Water level adjustment with a screw. Telescopic height adjustment.
Main characteristics	Dual entry - Side or bottom telescopic, Water saving - Approximate saving of 7L water per day (based on a family of 4).

JOLLYFILL

HIGH PERFORMANCE inlet valves

BOTTOM, TELESCOPIC AND SIDE ENTRY

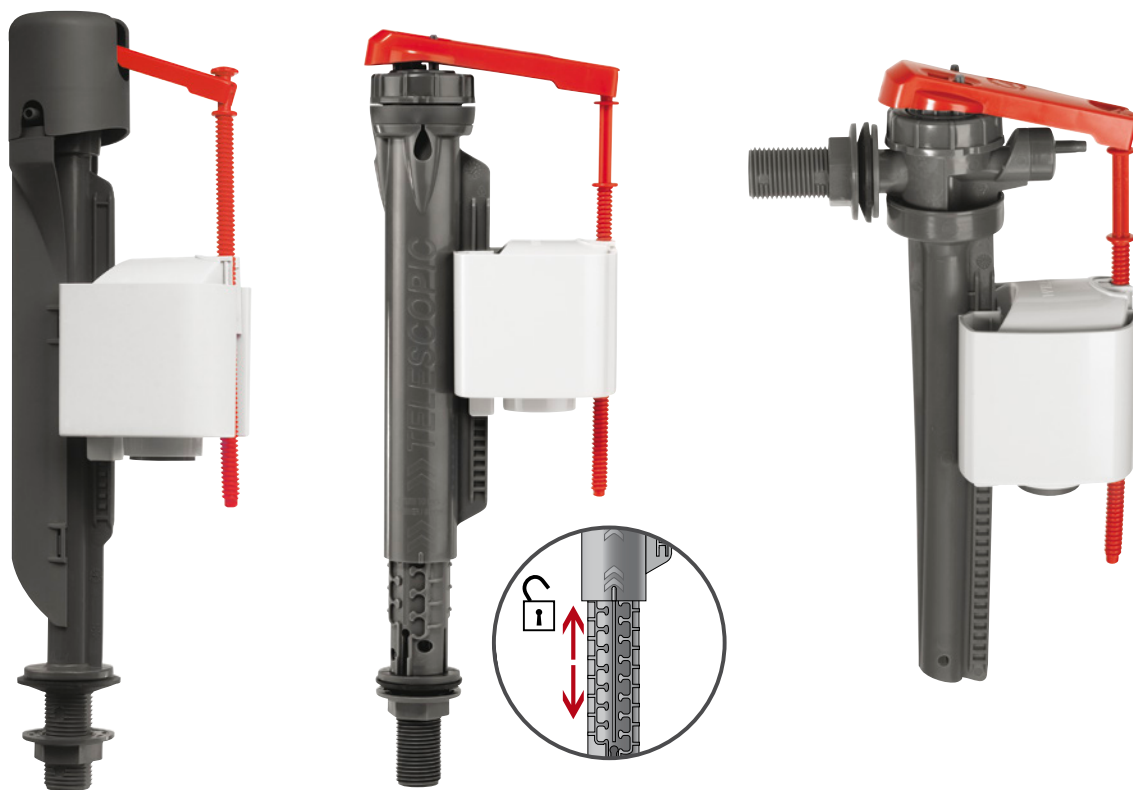

The **JOLLYFILL** is compact and ideal for small cisterns. It is fast filling and quick closing.

The **telescopic JOLLYFILL** utilises a patented system, which avoids breaking the inlet valve body, in case of unreasonable tightening.

The **side entry JOLLYFILL** with 180° head rotation allows installation in narrow tanks.



WATER SAVING

- Delayed action filling



QUICK AND EASY TO INSTALL AND MAINTAIN:

- Easy to adjust float level

BOTTOM ENTRY INLET VALVES



Description	DOBLO DUAL ENTRY 1/2" INLET FLOAT VALVE		JOLLYFILL BOTTOM ENTRY 1/2" INLET FLOAT VALVE			JOLLYFILL TELESCOPIC BOTTOM ENTRY 1/2" INLET FLOAT VALVE		JOLLYFILL TELESCOPIC BOTTOM ENTRY 3/8" INLET FLOAT VALVE
Reference	10932000	10922000	10932001	19998004	16100006	10932002	19998036	16110011
Ean code	3375539990779	3375539990779	3375539990588	3375539990144	3375537136759	3375539990724	33375539991141	3375537150441
Packaging	Box	Blister	Box	Blister	Bag	Box	Blister	Bag
Multiple / box qty	1 / 12	1 / 16	1 / 12	1 / 16	1 / 36	1 / 12	1 / 16	1 / 36
Inlet end	1/2" Plastic		1/2" Plastic			1/2" Plastic		3/8" Brass
Filling rate @ 0,1 bar	11 L/min @ 3 bar (side) 10 l/min @ 3 bar (bottom)		4.1 L/min			3.1 L/min		1.6 L/min
Functioning range	0.1 Up to 16 bar		0.1 Up to 16 bar			0.1 Up to 16 bar		0.1 Up to 16 bar
Water level adjustment	Screw		Screw			Screw		Screw
Main characteristics	"Dual entry - side or bottom telescopic water saving - delayed action"		"Ultra quiet (17 decibels) anti-siphoning eliminates water hammer"			"Patented system against unreasonable tightening ultra quiet (17 decibels) anti-siphoning eliminates water hammer"		
Technical drawing								

SIDE ENTRY INLET VALVES



Description	JOLLYFILL SIDE ENTRY 1/2" INLET FLOAT VALVE			TOPY SIDE ENTRY 1/2" INLET FLOAT VALVE	TOPY SIDE ENTRY 3/8" INLET FLOAT VALVE
Reference	10932010	19998024	16300101	16300601	16300501
Ean code	3375539990717	3375539990601	3375537150151	3375537160815	3375537161140
Packaging	Box	Blister	Bag	Bag	Bag
Multiple / box qty	1 / 8	1 / 8	1 / 36	1 / 40	1 / 40
Inlet end	1/2" plastic			1/2" plastic	3/8" brass
Filling rate @ 0,1 bar	3.8 L/min			1.5 L/min	1.3 L/min
Functioning range	0.1 up to 16 bar			0.1 up to 14 bar	0.1 up to 14 bar
Water level adjustment	Screw			Float rotation	Float rotation
Main characteristics	180° head rotation ideal for narrow tanks. Ultra quiet (17 decibels), Anti-siphoning, Eliminates water hammer			Ultra compact, Anti-siphoning	Special for Uni Compact cistern, Ultra compact, Anti-siphoning
Technical drawing					