HINGE FITTING INSTRUCTIONS

Quick fit bottom fix stainless steel hinge


271029
B_05/2021

BEFORE INSTALLING YOUR WIRQUIN TOILET SEAT

- Verify the colour and size.
- Check that the visual surface is free from cracks and surface defects.
- Ensure that all components are present and in a satisfactory condition.
- No claims will be entertained after installation.


2 YEARS WARRANTY

LOCK **ONLY SUPPLIED WITH SELECTED COMPATIBLE SEATS. Ignore this step if not included.**

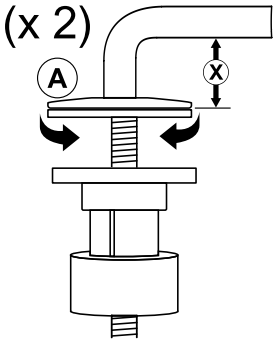


Part "A" is adjustable to ensure that the seat is level to the pan.

S1 seat (X) = 21mm
M1 seat (X) = 24mm

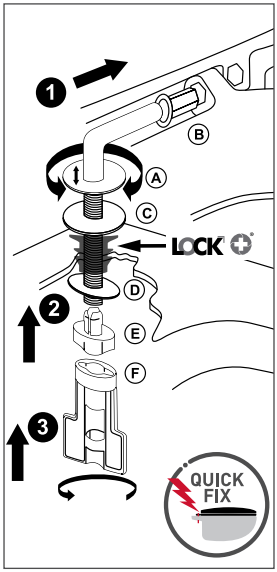



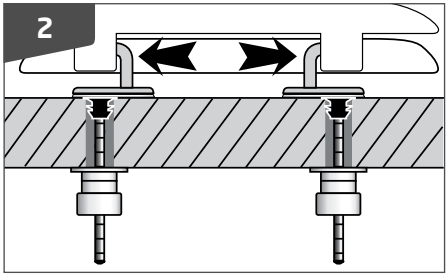

- Hinge position is not adjustable and designed to fit only a selection of pan dimensions.
- Hinges can be fitted on the inside (*or outside of selected seats) of the seat as shown in diagram 2.
- Adjust the hinges to fit the seat in the correct position on the pan.
- Ensure the pins of the hinges are all the way into the seat before securing the hinges. Failing to do so could cause damage to your seat. Please ensure that the seat is secure before use.

CARE AND CLEANING INSTRUCTIONS

- The seat and cover should be cleaned using warm soapy water.
- Do NOT use aggressive or abrasive cleaners as this may scratch the surface.
- The hinges should be cleaned using soap or mild detergent.
- After cleaning, the hinges should be rinsed in clean water and dried.
- NEVER use bleach, concentrated cleaners or acids as this will cause discolouring and pitting.
- Do not leave bleach in the toilet bowl with the cover closed because it may cause discolouration of the seat and hinges.
- The cover of the toilet seat is for decorative purposes only. The lid is not guaranteed to carry weight. **(Do NOT stand or sit on the cover.)**

WIRQUIN Manufacturing | 1 Hospital Road - Somerset East | Eastern Cape - 5850
T: +27 42 243 6000 | Email: enquiries@wirquin.co.za
www.wirquin.co.za

wirquin