HINGE FITTING INSTRUCTIONS

Top fit adjustable stainless steel hinge


271030
B_06/2021

BEFORE INSTALLING YOUR WIRQUIN TOILET SEAT

- Verify the colour and size.
- Check that the visual surface is free from cracks and surface defects.
- Ensure that all components are present and in a satisfactory condition.
- No claims will be entertained after installation.

2 YEARS WARRANTY


LOCK **ONLY SUPPLIED WITH SELECTED COMPATIBLE SEATS. Ignore this step if not included.**

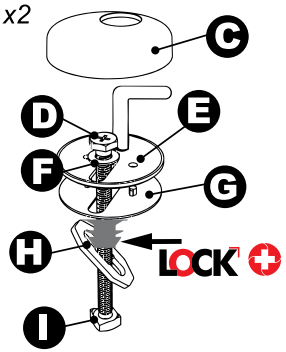







A : INSTALLATION OF FIXATION TO PAN



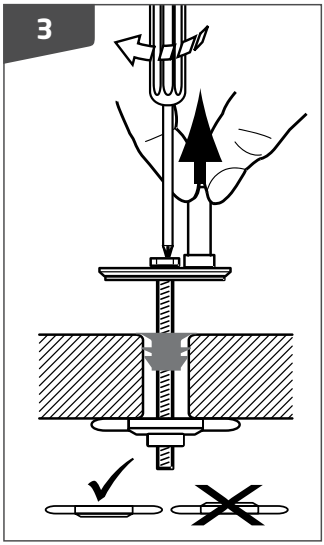

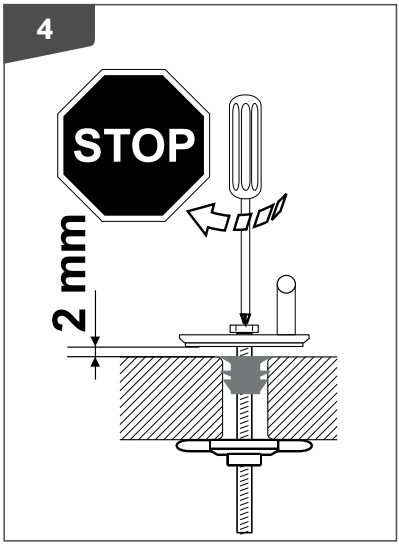


wirquin


HINGE FITTING INSTRUCTIONS

Top fit adjustable stainless steel hinge


271030
B_06/2021

B : INSTALLATION OF THE SEAT

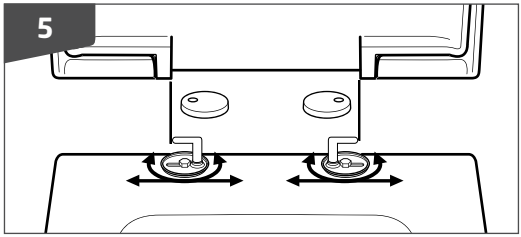


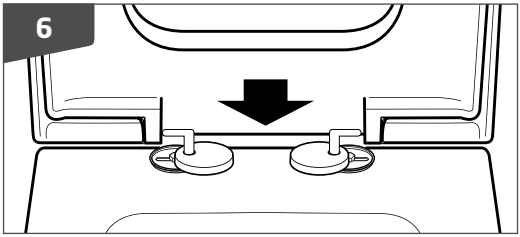

- Place hinge covers on and lower seat into position.

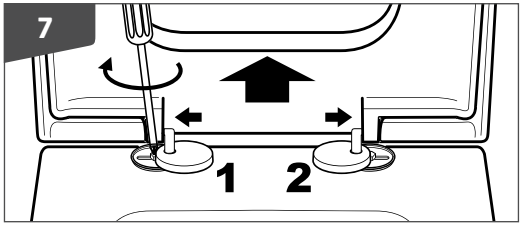

- Slide hinges into position.
- Adjust seat to correct position - left & right plus front to back. When the ideal position for the seat has been found, lift seat vertically and fix in place by tightening the nuts on the top of the pan.
- Rotate hinge covers into position.

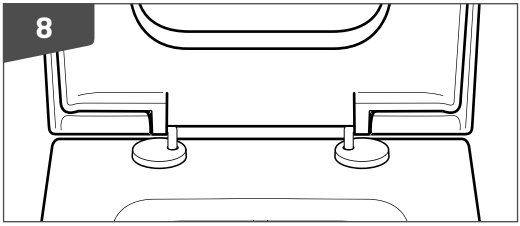

- Please ensure that the seat is secure before use.

CARE AND CLEANING INSTRUCTIONS

- The seat and cover should be cleaned using warm soapy water.
- Do NOT use aggressive or abrasive cleaners as this may scratch the surface.
- The hinges should be cleaned using soap or mild detergent.
- After cleaning, the hinges should be rinsed in clean water and dried.
- NEVER use bleach, concentrated cleaners or acids as this will cause discolouring and pitting.
- Do not leave bleach in the toilet bowl with the cover closed because it may cause discolouration of the seat and hinges.
- The cover of the toilet seat is for decorative purposes only. The lid is not guaranteed to carry weight. **(Do NOT stand or sit on the cover.)**

WIRQUIN Manufacturing | 1 Hospital Road - Somerset East | Eastern Cape - 5850
T: +27 42 243 6000 | Email: enquiries@wirquin.co.za
www.**wirquin**.co.za