
INLET VALVE

Guarantee 10 YEARS

DOBLO

▶ *Dual entry: fits all water supplies, bottom or side entry*

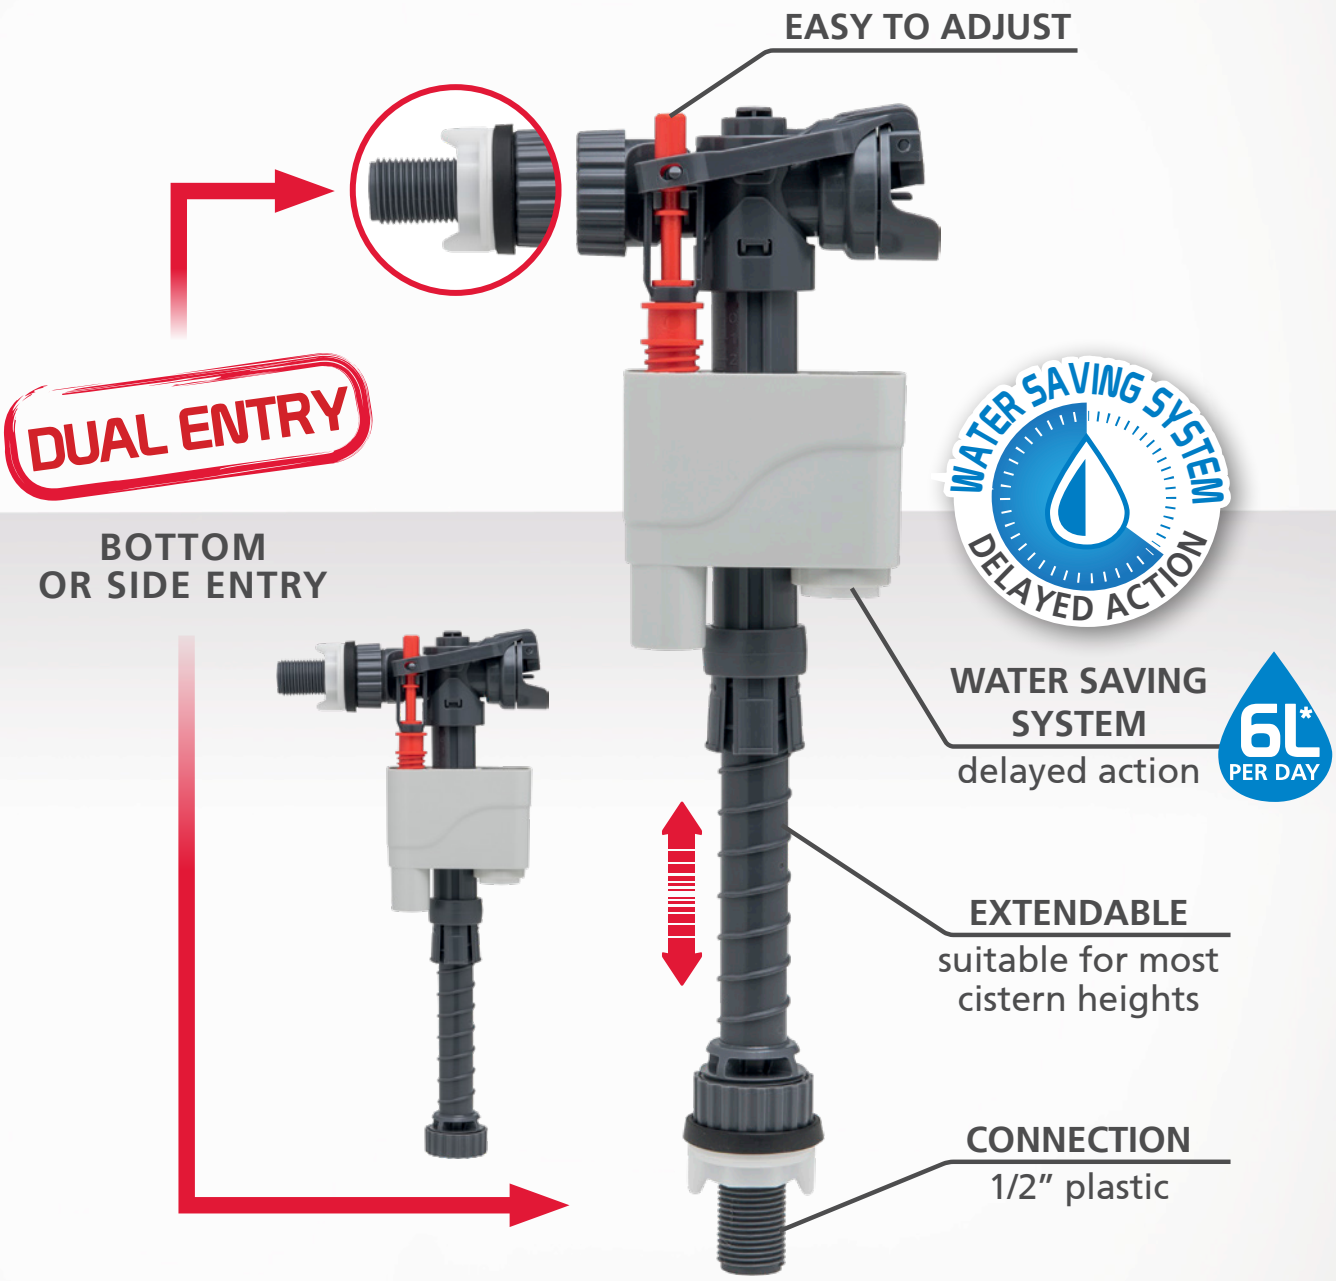

DOBLO inlet valve fits ALL WATER SUPPLIES: bottom or side entry, thanks to its removable inlet. In addition, its DELAYED ACTION TECHNOLOGY saves up to 7L of water per day.

wirquin PRO
SANITARY EQUIPMENT SPECIALIST


INLET VALVE

DOBLO: INLET VALVE
servo-valve side or bottom entry

BENEFITS

BOTTOM ENTRY


SIDE ENTRY

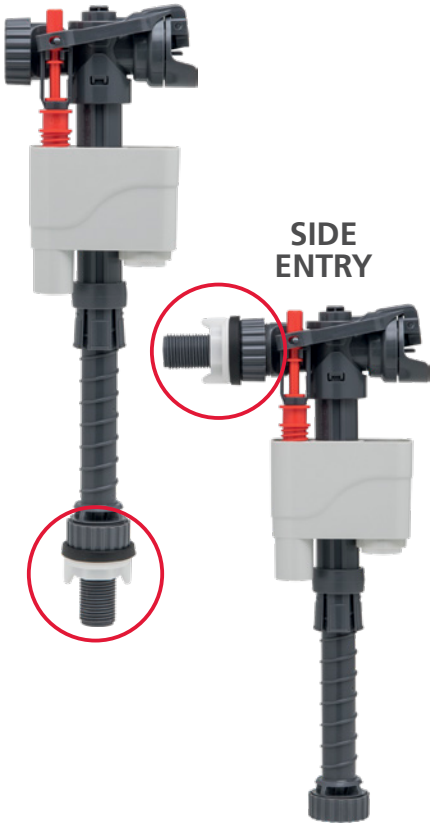

- DUAL ENTRY: fits all water supplies, bottom or side entry.
- WATER SAVING SYSTEM: delayed action.
- RESISTANT: (15mm) 1/2" plastic inlet tail.
- EASY TO ADJUST: telescopic height adjustment and water level adjustment with a screw.
- QUICK FILLING: around 35 seconds for 6L at 3 bars.
- QUIET.
- PRESSURE: from 0,2 to 16 bars, resists pressure spikes of up to 20 bars.

WATER SAVING SYSTEM DELAYED ACTION

Thanks to the **DELAYED ACTION technology**, the inlet valve only fills up when the tank is completely empty.

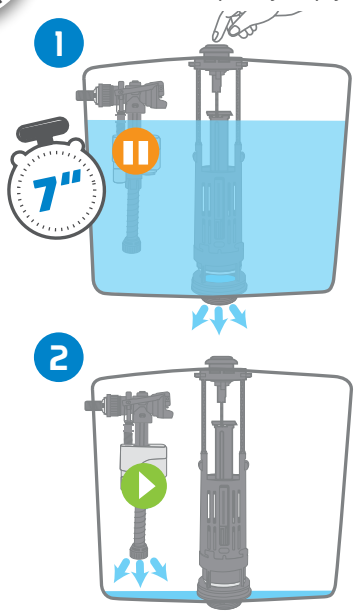


WATER SAVING SYSTEM

* Means a 6L water saving per day (based on a family of 4).

6L* per day

TECHNICAL CHARACTERISTICS

TYPE	Servo-valve
ENTRY	Side or bottom telescopic - plastic inlet 1/2"
FILLING RATE	11 L/min (side entry) 10 L/ min (bottom entry)
PRESSURE	From 0,2 to 16 bars. Resists pressure spikes of up to 20 bars.
ADJUSTMENT	Water level adjustment with a screw. Telescopic height adjustment.
WATER SAVING	Means a 6L water saving per day (based on a family of 4).

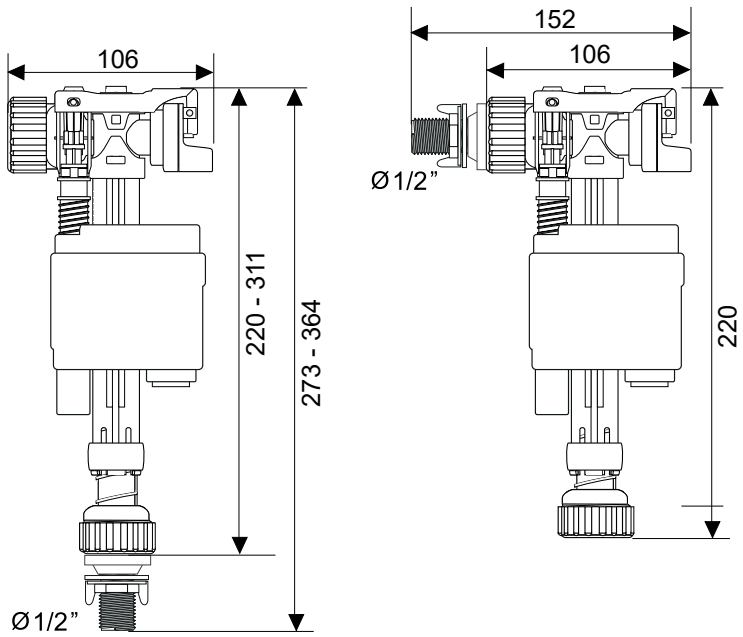



Watch our installation video !

Description	Reference	EAN code	Packaging
DOBLO 1/2" plastic side or bottom telescopic	10932000	3375539990946	Box

WIRQUIN Manufacturing - Hospital Street - Somerset East - SOUTH AFRICA | Email: enquiries@wirquin.co.za | Tel: 042 243 6000
www.wirquin-pro.co.za

90932100 - 06/2018